

18G Series Door

www.cdoorsandframes.com

1-844-649-1843



18G Series Door - 18 Gauge, A40 Galvanized, Flush Door

Design

Following ANSI/SDI A250.6, A250.8, and A250.10



- 1-3/4" Reversible Flush Door
- 18GA Galvanized Steel Skin
- 16GA Flush Top Channel
- 16GA Inverted Bottom Channel
- 12GA Door Closer Reinforcement
- 10GA Hinge Reinforcement
- Non Handed, Square Edge Design

Certificates

- WHI 3 Hrs Fire Rated
- Positive Pressure & S Label
- STC Rated
- Thermal Rated

Core Types

- Polystyrene
- Honeycomb

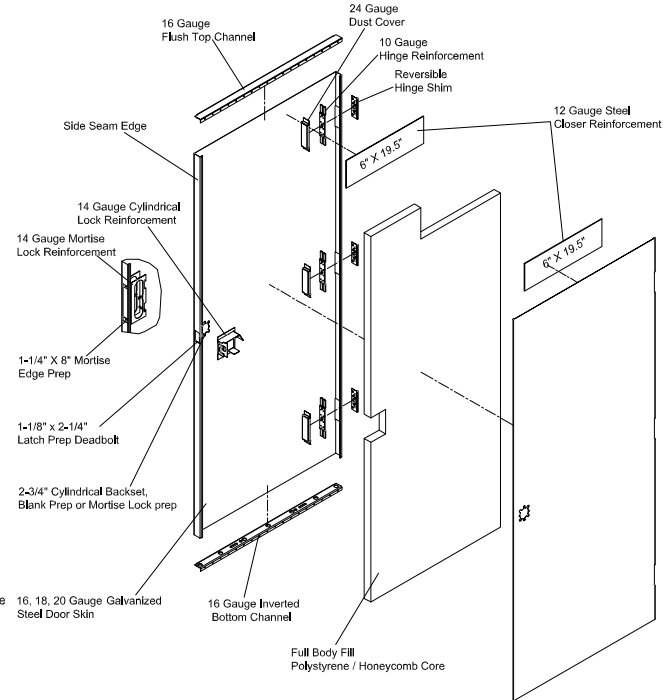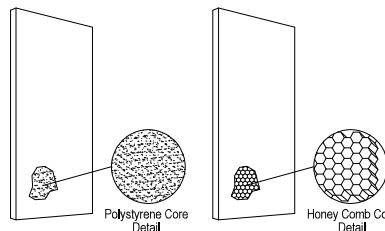


Door Sizes per ANSI SDI A250.8

Widths*	Ft-in	2'0"	2'4"	2'6"	2'8"	2'10"	3'0"	3'4"	3'6"	3'8"	4'0"
	mm	610	711	762	813	864	914	1016	1067	1118	1219

* Sizes shown are for single doors only; equal pairs of doors use twice the width indicated. Pairs of doors can consist of two unequal widths.

Heights	1-3/4" Doors	Ft-in	6'8"	7'0"	7'2"	8'0"
		mm	2032	2134	2184	2438

Door Types Example – per SDI Standard

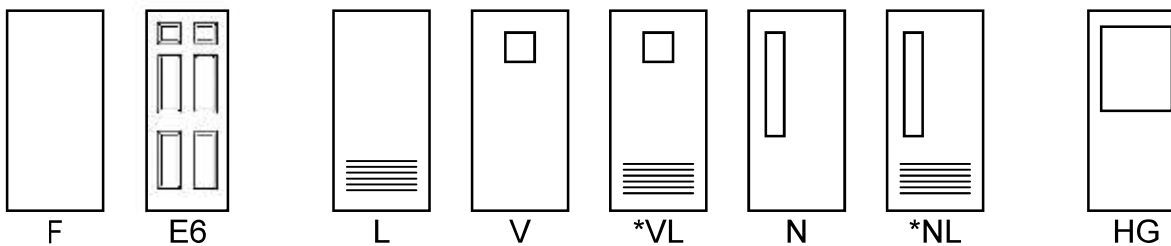

3hrs Label Style

F – Flush

L – Louvered (top or bottom)

V – Vision Light

VL – Vision Light and Louvered

N – Narrow Light

NL – Narrow Light and Louvered

E6 – 6 Panel Embossed

HG – Half Glass

* Doors with Windows and Louvers on the same door is non rated

1.5hrs Label Style

45mins Label Style

